


Type: Double Ended Beam

Material: Alloy Steel

Protection: IP 68

Application: Crane Scales, Hanging Scales



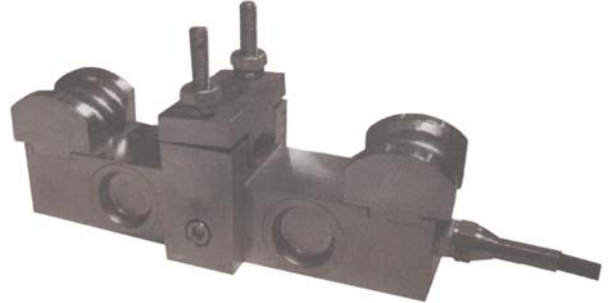


Specifications:

Capacity	t	1 / 2 / 3 / 5 / 10
Max. Number of Verification Intervals		2000
Temperature Effect on Zero	%FS/10°C	≤ ± 0.05
Temperature Effect on Sensitivity	%FS/10°C	≤ ± 0.05
Combined Error	%FS	≤ ± 0.05
Creep	%FS	≤ ± 0.1
Output Sensitivity	mv/v	1.0 ± 0.05
Input Resistance	Ω	750 ± 10
Output Resistance	Ω	702 ± 3
Insulation Resistance	MΩ	≥ 5000
Zero Balance	%FS	±1
Temperature, Compensated	°C	-20 ~ +60
Temperature, Operating	°C	-30 ~ +70
Excitation, Recommended	v	5 ~ 15
Safe Overload	%FS	150
Ultimate Overload	%FS	200
Standard Cable Length	m	10

Dimensions:

CAP.(t)	H	A	B	L	C
1	158.5	40	60	180	φ6~φ14
2	158.5	40	60	180	φ10~φ18
3	158.5	40	60	180	φ12~φ20
5	199.5	40	75	200	φ16~φ26
10	238	60	110	260	φ24~φ36

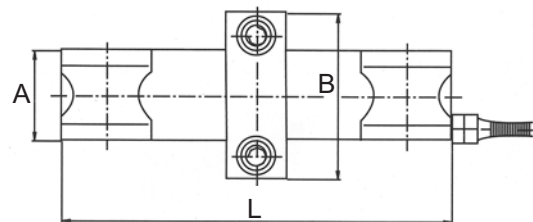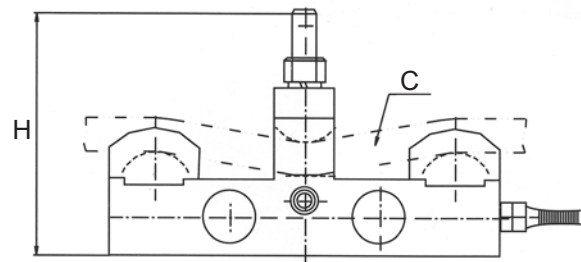

All dimensions: mm.